

Frequency Doubler 210A

High-Power 135 – 160 GHz

Bias-able Frequency Doubler in WR-6.5 Based on ACST's High-Power Multiplier Technology.

210x series is a family of passive biasable frequency doublers based on ACST high-power multiplier technology, covering frequency range between 135 GHz and 200 GHz. This series allows for building cost-effective high-power MM-Wave sources in combination with commonly-available High Power Amplifier MMIC technology developed for fixed service in telecommunications within frequency bands of 71 – 76 GHz, 81 – 86 GHz, and 92 – 95 GHz.

All multiplier designs within this series are based on balanced configuration to suppress undesired harmonics. These doublers provide a conversion efficiency of typically >25 % within frequency bandwidth of about 15 – 18 % and can reliably handle up to 600 mW of input power. For even higher power level requirements please ask ACST for availability of high- and ultrahigh-power versions.

Model 210A requires input signal within frequency range of 67.5 to 80 GHz, generating output signal within frequency range of 135 to 160 GHz. Bias control is required for optimal operation at specified input power levels. ACST usually provides a bias box calibrated according to customer specification for typically available input power.

Various options can optionally be offered and integrated on customer request:

- Horn antenna (for coupling the output signal to free space),
- Waveguide sections compatible with the output RF-port
- Waveguide Variable or fixed Attenuator
- Dedicated Source to provide optimal input RF power

Please consult sales@acst.de for available options for this product type



Product Features

- > Compactness & High-Power & Efficiency
- > Large bandwidth
- > Flat response

Technical Specification

| | Minimum | Typ | Maximum |
|----------------------------|---------|-------------|---------|
| Input Port (UG 387/U-M) | | WR-12 | |
| Input Frequency (GHz) | 67.5 | | 80 |
| Input Power (dBm) | +23 | +26 | +27.5 |
| Output Port (UG 387/U-M) | | WR-6.5 | |
| Output Frequency (GHz) | 135 | | 160 |
| Output Power (dBm) | | +20 | +23 |
| Conversion Efficiency* (%) | 20 | 30 | 35 |
| Input VSWR | 1.45:1 | 1.6:1 | 1.9:1 |
| Material | | Brass | |
| Finishing | | Gold-Plated | |

Application Areas



- > Laboratory instrumentation
- > MM-wave FMCW-Radar
- > Active imaging
- > 5G Telecommunications
- > LO Source for MM/SubMM wave heterodyne receivers

* Lower Efficiency may be expected at input power lower than specified and near the band edges.

Frequency Doubler 210A

High-Power 135 – 160 GHz

Typical Performance

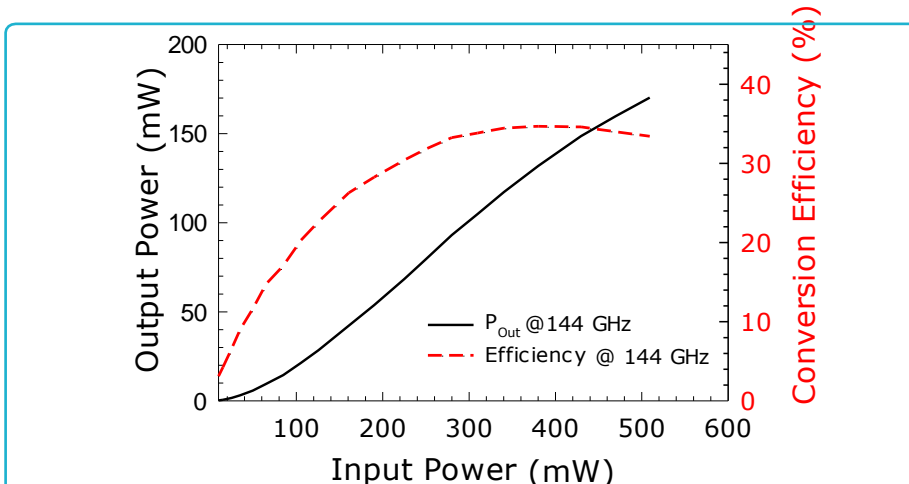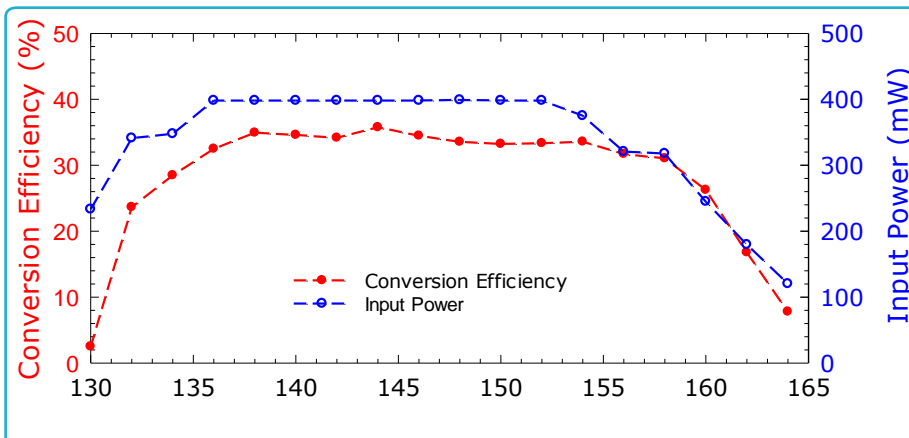

Absolute Maximum Ratings

| | Maximum |
|--------------------------------------|----------------------------|
| Input Power (dBm) | +28 |
| Operational Temperature and Humidity | 5 °C to 45 °C // 0% to 80% |
| Storage Temperature and Humidity | 5 °C to 65 °C // 0% to 80% |

Order information

- Please indicate product name and type.
- Please indicate expected input power requirements

Notes

- > All plotted data represent typical values. The actual data may vary from unit to unit.
- > All tests are carried out at a room temperature of 24 °C.
- > All tests are carried out using the included Bias Box 711A

Caution

- > Absolute maximum ratings should not be used under normal operating conditions. Exceeding maximum ratings may lead to permanent failure.
- > Any foreign body inserted into the waveguide will cause a loss of performance and may damage the device.




ACST GmbH reserves the right to make changes to the product or information contained herein without notice. Visit www.acst.de for additional data sheets and product information.

Frequency Doubler 210A

High-Power 135 – 160 GHz

Outline Dimensions

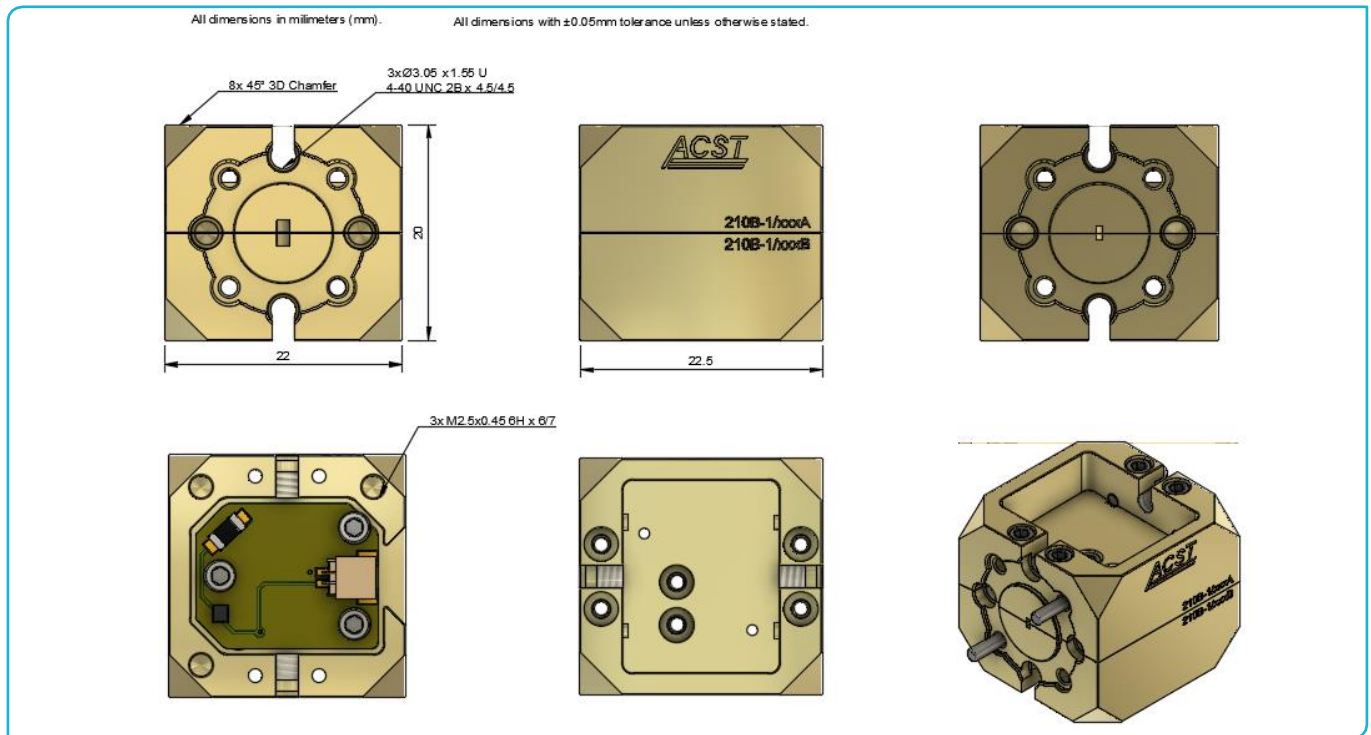

Mechanical Description

| | Maximum |
|------------------------------|-------------------------|
| Size (without dowel pin) | 22.5 mm x 22 mm x 20 mm |
| Output Waveguide Orientation | E-Plane |